

### Black Paint Spray

#### DESCRIPTION

High quality fast drying paint for application on preliminary treated or untreated surfaces.

#### APPLICATION

For small and spot repair in car refinishing.

#### CHARACTERISTICS

- Fast drying at room temperature
- Good opacity
- Excellent long-lasting appearance
- Non-fading and UV resistant
- Good resistance to weather effects, petrol and chemicals

#### SUBSTRATES

Primed metal parts, fully cured old / OEM coatings, wood, metal, aluminum, glass, stone and various types of plastic.




Articles	Description	Pcs. / pack
4-141-0400	matt, 400 ml	6
4-142-0400	glossy, 400 ml	6

#### SUBSTRATE PRETREATMENT



- Clean and degrease the surface with C.A.R.FIT Silicone Remover
- Remove old coating and sand corrosion spots with grit P80 – P240
- Again clean and degrease the surface with C.A.R.FIT Silicone Remover and thoroughly dry it
- It is recommended to apply a suitable primer on metal surface to improve adhesion of C.A.R.FIT Black Paint Spray

#### APPLICATION

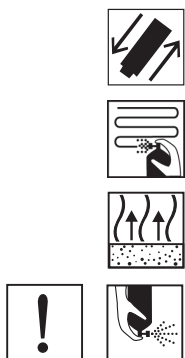

Shake thoroughly for at least 2 min

Apply 1 – 3 thin coats  
Consumption: 1 spray can / ca. 1 – 1.5 m<sup>2</sup>

Flash-off between layers: 3 – 5 min

- Spraying distance: 25 – 30 cm
- Apply at room temperature. Optimal application temperature: 15 – 25°C
- Shake the spray can once more before application of each new coat
- After use, hold aerosol can upside down and spray briefly to clean the nozzle

#### FURTHER TREATMENT



Air drying / 20°C  
· dust dry: 5-10 min    · dry to touch: 10-20 min    · can be overcoated after 2 h  
Drying time depends on environment temperature, humidity and coating thickness

#### TECHNICAL DATA

Basis	acrylic resin
Colour	black
Temperature resistance	up to 110°C

#### STORAGE



This is a pressurized container, do not expose to direct sunlight or store above 35°C